LED Auxiliary Lights - Model 832

PRODUCT INFORMATION

Description 12-24V LED Auxiliary Light with Flood

Beam Pattern

 Height
 154.94 mm / 6.1 in

 Width
 115.06 mm / 4.53 in

 Depth
 68.58 mm / 2.7 in

Shape Square

Outer Lens Material Polycarbonate

Outer Lens Color Clear

Housing Material Die-Cast Aluminum

Housing Color Black

Mounting Hardware Description (x1) 5/16"-18 x 0.58" Mounting Bolt

Mounting Type Universal Pedestal Mount

Minimum Operating -40 °C / -40 °F

Temperature

Maximum Operating 65 °C / 149 °F

Temperature

Connector or Wiring Integrated 2-Pin Deutsch Weather-Proof

Socket (DT04-2P)

Mating Connector 2-Pin Deutsch Weather-Proof Plug


(DT06-2S)

Product Weight 1.82 lbs / 0.83 kgs **Shipping Weight** 1.82 lbs / 0.83 kgs



LED Auxiliary Lights - Model 832

PRODUCT DIMENSIONS

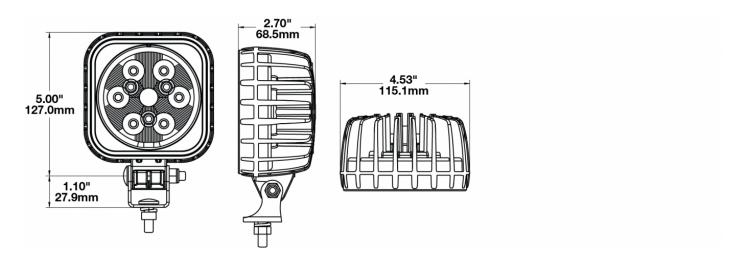

ELECTRICAL SPECIFICATIONS

Input Voltage 12-24V DC
Operating Voltage 10-32V DC
Red Wire Positive
Black Wire Negative
Current Draw 3.5A @ 12V

Surrent Draw 3.5A @ 12V DC 1.75A @ 24V DC


REGULATORY STANDARDS COMPLIANCE







Buy America Standards IEC IP69K Eco Friendly
UL Recognized





LED Auxiliary Lights - Model 832

PHOTOMETRIC SPECIFICATIONS

Raw Lumen Output 3,900 **Effective Lumen** 2,400


Output

Nominal LED Color

Temperature

Beam Pattern(s) Forward Lighting - Flood (Standard)

5700 K

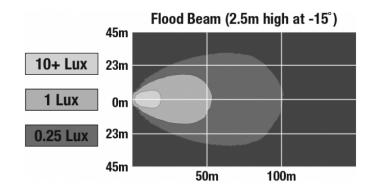

APPLICATIONS





















RELATED PRODUCTS



Part Number 1300161 12-24V LED Auxiliary Light with Spot Beam Pattern



Part Number 1300171 12-24V LED Auxiliary Light with Trapezoid Beam Pattern

Print date: 2018-10-23

